

821 BROCK RD, UNIT 1  
 PICKERING, ONT  
 L1W 3L6  
 TEL:(905)837-1115  
 FAX:(905)837-7588

SOLD TO:

WALL PATTERN: \_\_\_\_\_  
 FLOOR PATTERN: \_\_\_\_\_  
 MIL: \_\_\_\_\_

TAG NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 P.O: \_\_\_\_\_

LEFT HAND  
 STANDING FROM S.E

MUST PROVIDE PERIMETER  
 TOTAL: \_\_\_\_\_

SAFETY LEDGE  
 IF LEDGE VARIES PLEASE INDICATE  
 [ ] NO [ ] YES  
 RIGHT LEDGE \_\_\_\_\_ IN. LEFT LEDGE \_\_\_\_\_ IN.  
 END LEDGE \_\_\_\_\_ IN.

CHECK OFF BEAD TYPE  
 [ ] STANDARD  
 [ ] OTHER \_\_\_\_\_  
 [ ] NO BEAD \_\_\_\_\_ IN. OVERLAP

INSTRUCTIONS:

STEP 1: Position 2 stakes (A & B) at least 10' apart as shown in the diagram. When positioning the stakes make sure that they are parallel to the longest length of the pool and a least 3' away from the pool.  
 \*Note: Do not remove until the liner has been installed.

STEP 2: Define the break-off and pad with measurements from these stakes.

STEP 3: Define the shape of the POOL by taking measurements, approximately every 2' around the perimeter of the pool.



\*NOTE: Decrease the distance between the points you are using to 6' around reverse or small radius.

STEP 4: Fill in the other measurements required as indicated by the boxes provided.

\*NOTE: PERIMETER MUST BE PROVIDED SO THAT THE PLOT MEASUREMENTS CAN BE VERIFIED!!!

STEP 5: If stakes are positioned differently from the drawing, indicate the position.

INDICATE CORNER TYPE

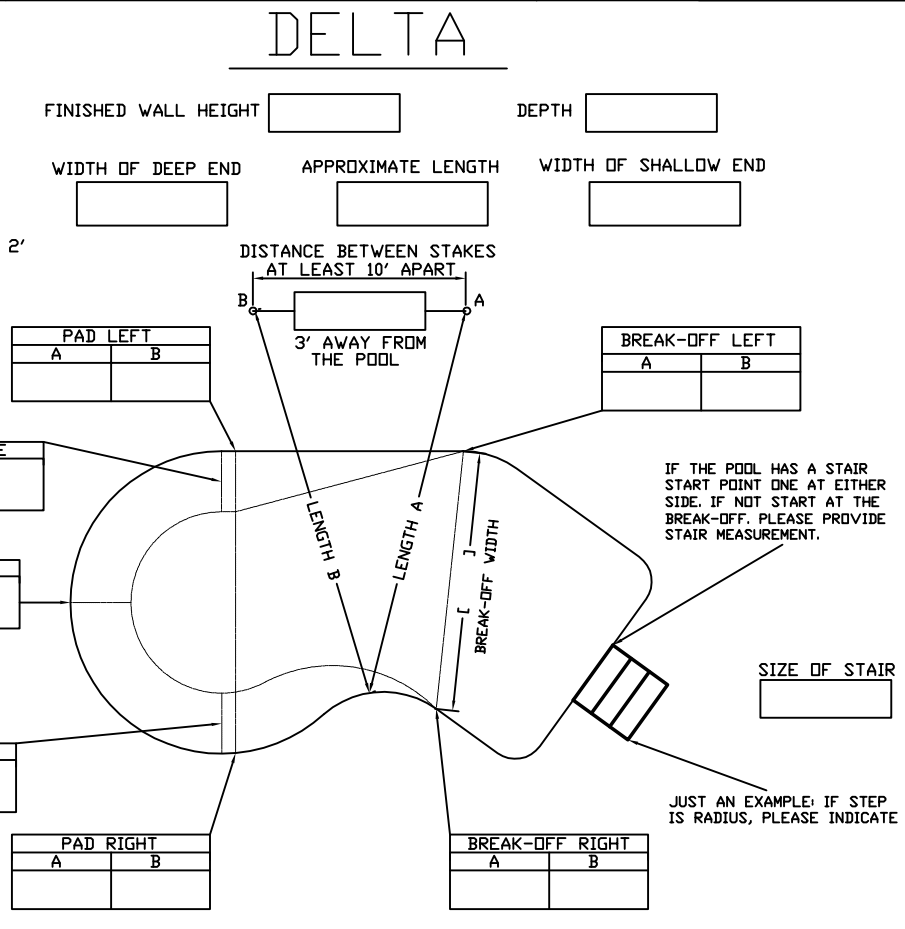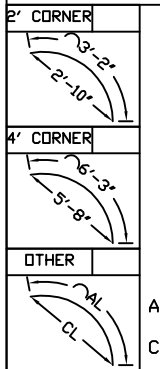

MEASUREMENTS

	A	B	A	B
1			31	
2			32	
3			33	
4			34	
5			35	
6			36	
7			37	
8			38	
9			39	
10			40	
11			41	
12			42	
13			43	
14			44	
15			45	
16			46	
17			47	
18			48	
19			49	
20			50	
21			51	
22			52	
23			53	
24			54	
25			55	
26			56	
27			57	
28			58	
29			59	
30			60	

