

821 BROCK RD. UNIT 1
 PICKERING, ONT
 L1W 3L6
 TEL:(905)837-1115
 FAX:(905)837-7588

SOLD TO:

WALL PATTERN: _____
 FLOOR PATTERN: _____
 MIL: _____

TAG NAME: _____
 DATE: _____
 P.O: _____

RIGHT HAND
 STANDING FROM S.E

MUST PROVIDE PERIMETER
 TOTAL: _____

SAFTEY LEDGE
 IF LEDGE VARIES PLEASE INDICATE
 [] NO [] YES
 RIGHT LEDGE _____ IN. LEFT LEDGE _____ IN.
 END LEDGE _____ IN.

CHECK OFF BEAD TYPE
 [] STANDARD
 [] OTHER _____
 [] NO BEAD _____ IN. OVERLAP

INSTRUCTIONS:

STEP 1: Postion 2 stakes (A & B) at least 10' apart as shown in the diagram. When positioning the stakes make sure that they are parrallel to the longest length of the pool and a least 3' away from the pool.
 *Note: Do not remove until the liner has been installed.

STEP 2: Define the break-off and pad with measurements from these stakes.

STEP 3: Define the shape of the POOL by taking measurements, approximatly every 2' around the perimeter of the pool.


*NOTE: Decrease the distance between the points you are using to 6' around the reverse or small radius.

STEP 4: Fill in the other measurements required as indicated by the boxes provided.

*NOTE: PERIMETER MUST BE PROVIDED SO THAT THE PLOT MEASUREMENTS CAN BE VERIFIED!!!

STEP 5: If stakes are positioned differently from the drawing indicate the position.


SAHARA

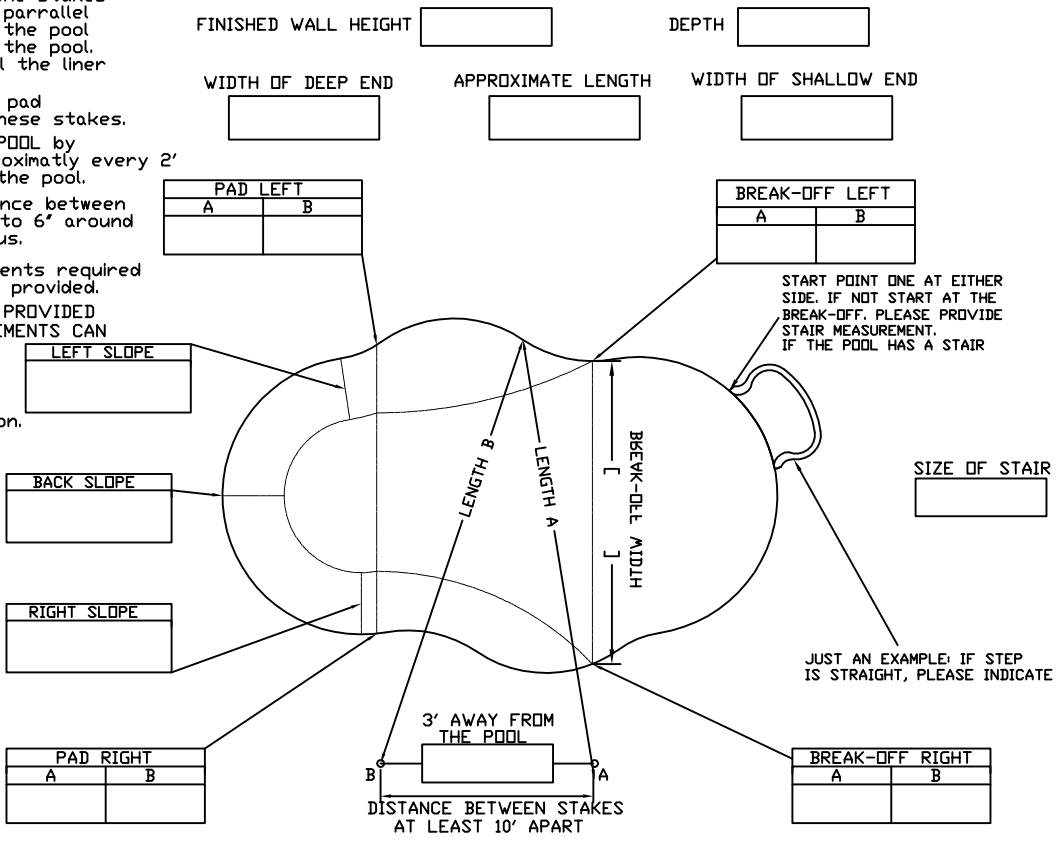

MEASUREMENTS

	A	B	A	B
1		31		
2		32		
3		33		
4		34		
5		35		
6		36		
7		37		
8		38		
9		39		
10		40		
11		41		
12		42		
13		43		
14		44		
15		45		
16		46		
17		47		
18		48		
19		49		
20		50		
21		51		
22		52		
23		53		
24		54		
25		55		
26		56		
27		57		
28		58		
29		59		
30		60		

COVE PROFILE

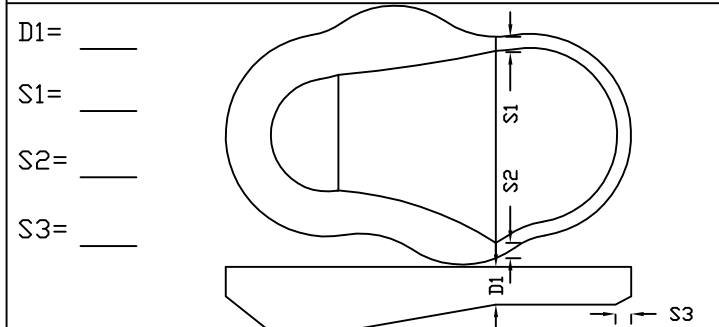

DEEPER BREAK PROFILE

